


| RevNo | Revision note | Date | Signature | Checked |
|-------|---------------|------|-----------|---------|
| | | | | |

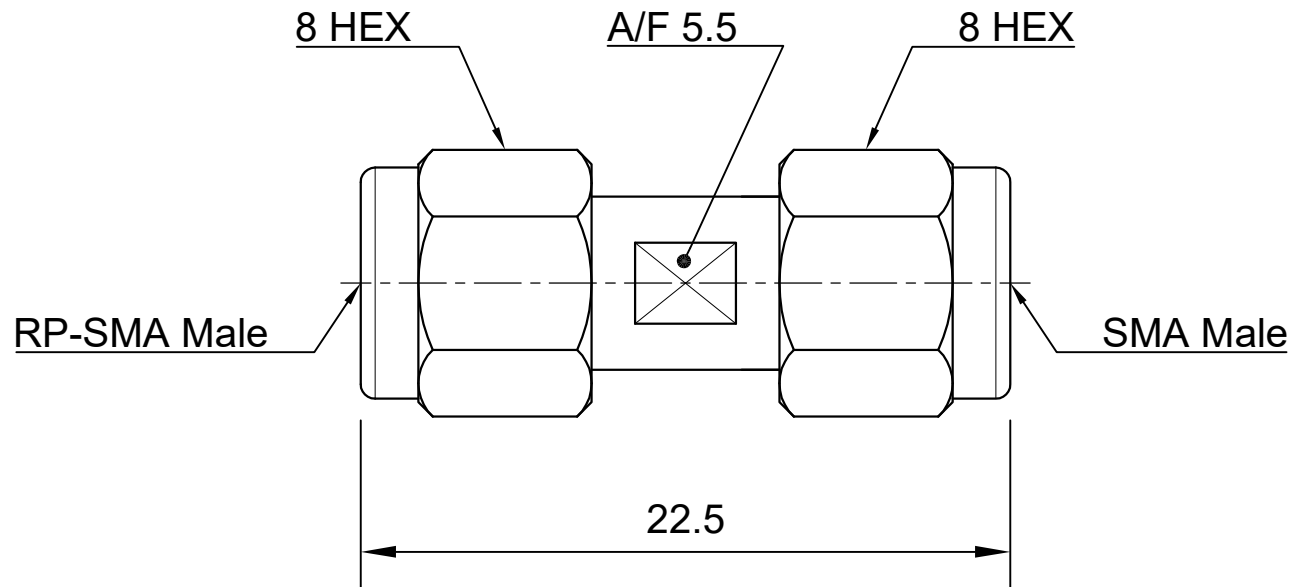

TECHNICAL DATA

| | |
|----------------------|------------------|
| Type | Adapter |
| Orientation | Straight |
| Impedance (Ohms) | 50 |
| Adapter Side 1 | RP-SMA |
| Side 1 Gender | Plug |
| Adapter Side 2 | SMA |
| Side 2 Gender | Plug |
| Body Finish | Gold |
| Body Material | Brass |
| Contact Finish | Gold |
| Contact Material | Beryllium Copper |
| Insulator Material | PTFE |
| Max. Frequency (GHz) | 18 |
| Mounting Feature | -- |
| Min. Temp. (Celsius) | -65 |
| Max. Temp. (Celsius) | 165 |
| Weight (Grams) | 5.5 |

| | | | | |
|--------|------------------------------------|------------|-------|-----|
| | SHEET | 1 of 1 | SCALE | NTS |
| | RF ADAPTER | | | |
| | RP-SMA Male to SMA Male | | | |
| | STRAIGHT TYPE | | | |
| | DWG NO VSW-AD-861231RP-S | | | |
| DRAWN | VINAY | 22.10.2018 | | |
| CHECK | | | | |
| APPR. | VINAY | 22.10.2018 | | |
| ISSUED | | | | |
| REV | R0 | | | |

FILE PATH: D:\VINSUR\DRAWINGS -- VINSUR\ADAPTERS\SMA - SMA

FILE NAME: ADAPTER - RP SMA Male to SMA Male - VSW-AD-861231RP-S.dwg

SIZE

1 2 3 4 5 6 7 8